
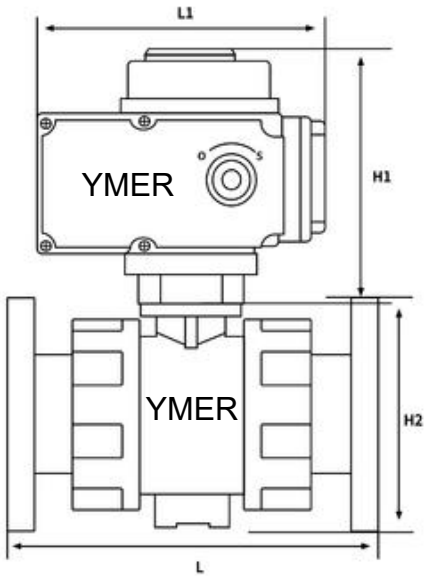


10UPYFQ+CE... 系列电动UPVC球阀

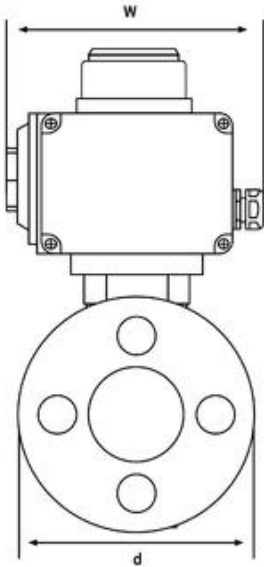

参数&尺寸 (mm)

阀体参数			
公称通径		DN15-DN100	
公称压力		PN10	
O型密封圈材质		EPDM	
材质	阀体	UPVC	
	球板	UPVC	
	阀座密封	PTFE	
温度		0~80℃	
连接方式		法兰	
适用介质		水、空气、油类、腐蚀性介质	

型号	扭矩	口径	d	W	L1	H1	L	H2
(AC220V) 10UPYQ+ CEA220S 开关型	30Nm	DN15	19	135	140	126	120	64
		DN20	25	135	140	126	135	76
		DN25	32	135	140	126	150	82.5
		DN32	40	135	140	126	167	96
		DN40	50	135	140	126	178	112.5
		DN50	63	135	140	126	204	136
	50Nm	DN65	79	145	168	160	234	163.5
		DN80	90	145	168	160	259	191.5
		DN100	125	145	168	160	311	232

型号	扭矩	口径	d	W	L1	H1	L	H2
(AC220V) 10UPYQ+ CEA220SA/SV 调节型 (DC24V) 10UPYQ+ CED24S 开关型 (DC24V) 10UPYQ+ CED24SA/SV 调节型	50Nm	DN15	19	145	168	160	120	64
		DN20	25	145	168	160	135	76
		DN25	32	145	168	160	150	82.5
		DN32	40	145	168	160	167	96
		DN40	50	145	168	160	178	112.5
		DN50	63	145	168	160	204	136
		DN65	79	145	168	160	234	163.5
		DN80	90	145	168	160	259	191.5
		DN100	125	145	168	160	311	232