


16PPS3T/LQ+CE... 系列电动不锈钢球阀

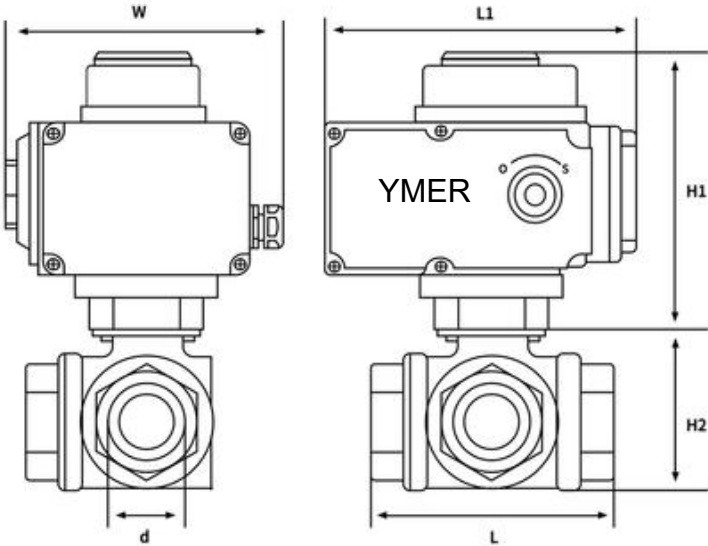

参数&尺寸 (mm)

阀体参数		
公称通径		DN8-DN50
公称压力		PN16
材质	阀体	不锈钢
	球板	不锈钢
	阀座密封	四氟垫
温度		-20-150℃
连接方式		丝扣
适用介质		水、空气、油类、腐蚀性介质

型号	扭矩	口径	d	W	L1	H1	L	H2
(AC220V) 16PPS3T/LQ+ CEA220S 开关型	30Nm	DN8	10	135	140	126	68	52
		DN10	15	135	140	126	68	52
		DN15	20	135	140	126	68	52
		DN20	25	135	140	126	78	60
		DN25	32	135	140	126	87	70
	50Nm	DN32	40	145	168	160	141	90
		DN40	50	145	168	160	129	105
		DN50	65	145	168	160	141	115

型号	扭矩	口径	d	W	L1	H1	L	H2
(AC220V) 16PPS3T/LQ+ CEA220SA/SV 调节型 (DC24V) 16PPS3T/LQ+ CED24S 开关型 (DC24V) 16PPS3T/LQ+ CED24SA/SV 调节型	50Nm	DN8	10	145	168	160	68	52
		DN10	15	145	168	160	68	52
		DN15	20	145	168	160	68	52
		DN20	25	145	168	160	78	60
		DN25	32	145	168	160	87	70
		DN32	40	145	168	160	141	90
		DN40	50	145	168	160	129	105
		DN50	65	145	168	160	141	115

三通换向图

