
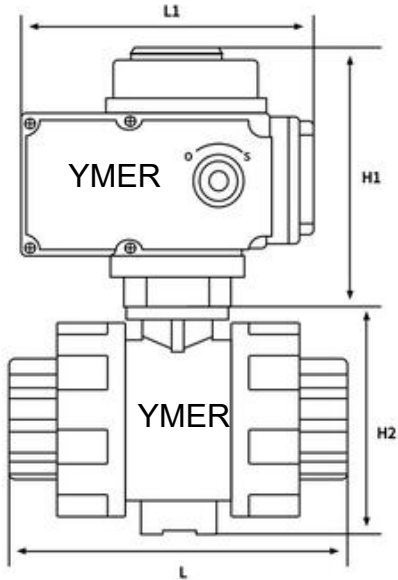


10PPHQ+CE... 系列电动PPH球阀

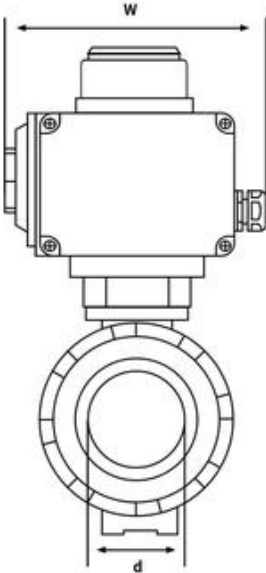

参数&尺寸 (mm)

阀体参数			
公称通径		DN15-DN100	
公称压力		PN10	
O型密封圈材质		EPDM	
Material	Body	PPH	
	球板	PPH	
	阀座密封	PTFE	
温度		0~80℃	
连接方式		双由令	
适用介质		水、空气、油类、腐蚀性介质	

型号	扭矩	口径	d	W	L1	H1	L	H2
(AC220V) 10PPHQ+ CEA220S 开关型	30Nm	DN15	19	135	140	126	108	63
		DN20	24	135	140	126	118	75
		DN25	31	135	140	126	132	82
		DN32	39	135	140	126	148	95
		DN40	49	135	140	126	160	111.5
		DN50	62	135	140	126	182	135
	50Nm	DN65	74	145	168	160	205	173
		DN80	88	145	168	160	227	205
		DN100	125	145	168	160	259	238

型号	扭矩	口径	d	W	L1	H1	L	H2
(AC220V) 10PPHQ+ CEA220SA/SV 调节型 (DC24V) 10PPHQ+ CED24S 开关型 (DC24V) 10PPHQ+ CED24SA/SV 调节型	50Nm	DN15	19	145	168	160	108	63
		DN20	24	145	168	160	118	75
		DN25	31	145	168	160	132	82
		DN32	39	145	168	160	148	95
		DN40	49	145	168	160	160	111.5
		DN50	62	145	168	160	182	135
		DN65	74	145	168	160	205	173
		DN80	88	145	168	160	227	205
		DN100	125	145	168	160	259	238